

NEOSTAR

3S+60 Dual-Glass Module

515W-545W

Technical Features:

 Partial Shading Optimisation

 Better Temperature Coefficient

 High Temperature Restriction


 Micro-crack Resistance

 Higher Power

 Lower BOS

 More Aesthetic Values

 Infinite Technology



red dot winner 2023



Ariel Green



Product
Warranty



Performance
Warranty

IEC61215/IEC61730
IEC61701/IEC62716

ISO9001:ISO Quality Management System
ISO14001:ISO Environmental Management System
ISO14064:Greenhouse Gas Verification Statement
ISO45001:ISO Occupational Health and Safety Management System



545W
Output

24.6%
Efficiency

≤1%
First-year Degradation

≤0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

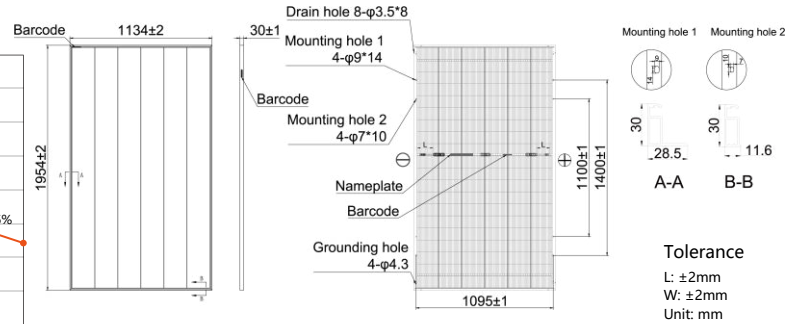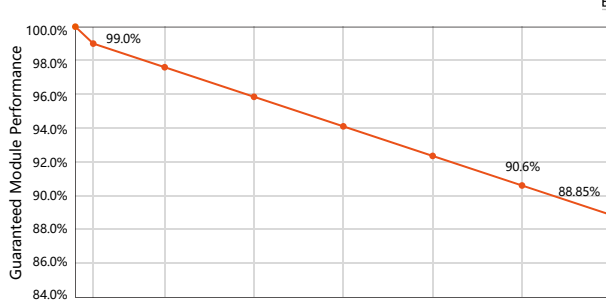

Electrical Characteristics																(STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)						Power Tolerance:0~ +3%					
Module Type	AIKO-A515-MCE60Db			AIKO-A520-MCE60Db			AIKO-A525-MCE60Db			AIKO-A530-MCE60Db			AIKO-A535-MCE60Db			AIKO-A540-MCE60Db			AIKO-A545-MCE60Db								
Test Conditions	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI						
P _{max} [W]	515	390	545	520	394	550	525	398	555	530	402	560	535	405	565	540	409	570	545	413	575						
V _{oc} [V]	45.10	42.79	45.10	45.20	42.88	45.20	45.30	42.98	45.30	45.40	43.07	45.40	45.50	43.17	45.50	45.60	43.26	45.60	45.70	43.36	45.70						
V _{mp} [V]	37.90	35.96	37.90	38.00	36.05	38.00	38.10	36.15	38.10	38.20	36.24	38.20	38.30	36.34	38.30	38.40	36.43	38.40	38.50	36.53	38.50						
I _{sc} [A]	14.66	11.85	15.44	14.69	11.87	15.48	14.72	11.89	15.52	14.76	11.93	15.56	14.80	11.96	15.60	14.84	11.99	15.64	14.88	12.02	15.68						
I _{mp} [A]	13.59	10.87	14.39	13.69	10.94	14.48	13.79	11.02	14.57	13.88	11.10	14.67	13.97	11.17	14.76	14.07	11.25	14.85	14.16	11.32	14.94						
Module Efficiency	23.2%			23.5%			23.7%			23.9%			24.1%			24.4%			24.6%								

Product Specification

Cell Type	N-Type ABC
Front cover	2.0mm coated semi tempered glass
Rear cover	2.0mm semi-tempered glass
Frame	Black Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) ±1200mm
No. of Cells	120(6*20)
Junction Box	IP68, 3 bypass diodes
Connector	Original MC4-EVO2A
Weight	27.1kg±3%
Dimension	1954*1134*30mm
Package Detail	37pcs per pallet / 185pcs per 20'GP / 888pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

Operation Temperature	-40°C - +70°C
Maximum Series Fuse Rating	30A
Protection Class	ClassII
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	35 mm diameter hail at 23 m/s
Fire Rating	IEC Class A

